

Table A.2 Port Canaveral Nearshore Disposal : "During Construction" Sediment Samples (CN-92-XX)

Sample	Florida State Plane Coordinates (ft)	Percent Passing								Estimated Shell Content (%)
		No. 40	No. 60	No. 80	No. 100	No. 140	No. 170	No. 200	No. 230	
CN-92-1	E 628,200 N 1,453,600	99.9	99.3	95.8	87.5	30.1	17.6	9.2	5.9	0.05-0.1
CN-92-2	E 628,280 N 1,454,570	99.2	97.4	93.3	84.4	33.6	24.9	19.5	18.0	0
CN-92-3	E 628,288 N 1,455,110	99.9	98.7	90.1	77.5	13.9	7.9	3.6	2.6	0
CN-92-4	Scow Sample	99.7	97.5	77.2	59.3	6.2	3.4	1.6	1.3	1.0-1.2
CN-92-5	E 628,115 N 1,452,715	100.0	98.9	93.4	82.5	35.6	26.8	21.2	19.6	0
CN-92-6	E 628,264 N 1,453,750	99.6	97.5	88.0	76.4	15.7	6.7	3.1	2.3	0-0.5
CN-92-7	E 628,350 N 1,454,761	99.8	97.6	90.3	77.0	14.2	8.1	3.2	2.2	0-0.2
CN-92-8	E 628,248 N 1,453,469	97.9	93.5	83.7	71.5	10.7	5.8	2.6	2.0	2.1
CN-92-9	E 628,392 N 1,454,241	98.3	95.0	87.3	71.8	9.2	5.1	2.0	1.5	1.7
CN-92-10	E 628,429 N 1,455,137	99.9	98.4	91.2	74.4	11.9	7.4	3.6	2.8	0
CN-92-11	E 628,243 N 1,453,046	89.4	83.5	72.4	53.1	7.3	2.7	1.2	1.0	4.0-6.0
CN-92-12	E 628,297 N 1,453,814	98.6	94.4	80.9	64.9	7.7	2.3	1.1	0.9	0.5-1.0
CN-92-13	E 628,341 N 1,453,905	96.3	90.7	76.5	58.2	8.5	3.9	2.2	2.0	3.0-3.7

* SAMPLING DATES : CN-92-(1-4) - June 12, 1992
 CN-92-(5-7) - June 14, 1992
 CN-92-(8-10) - June 20, 1992
 CN-92-(11-13) - July 20, 1992

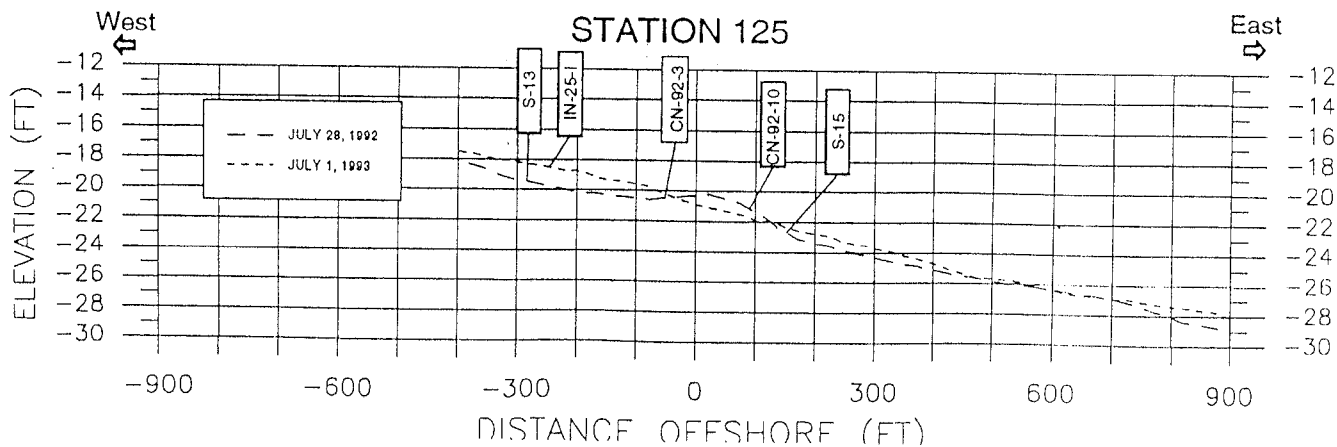
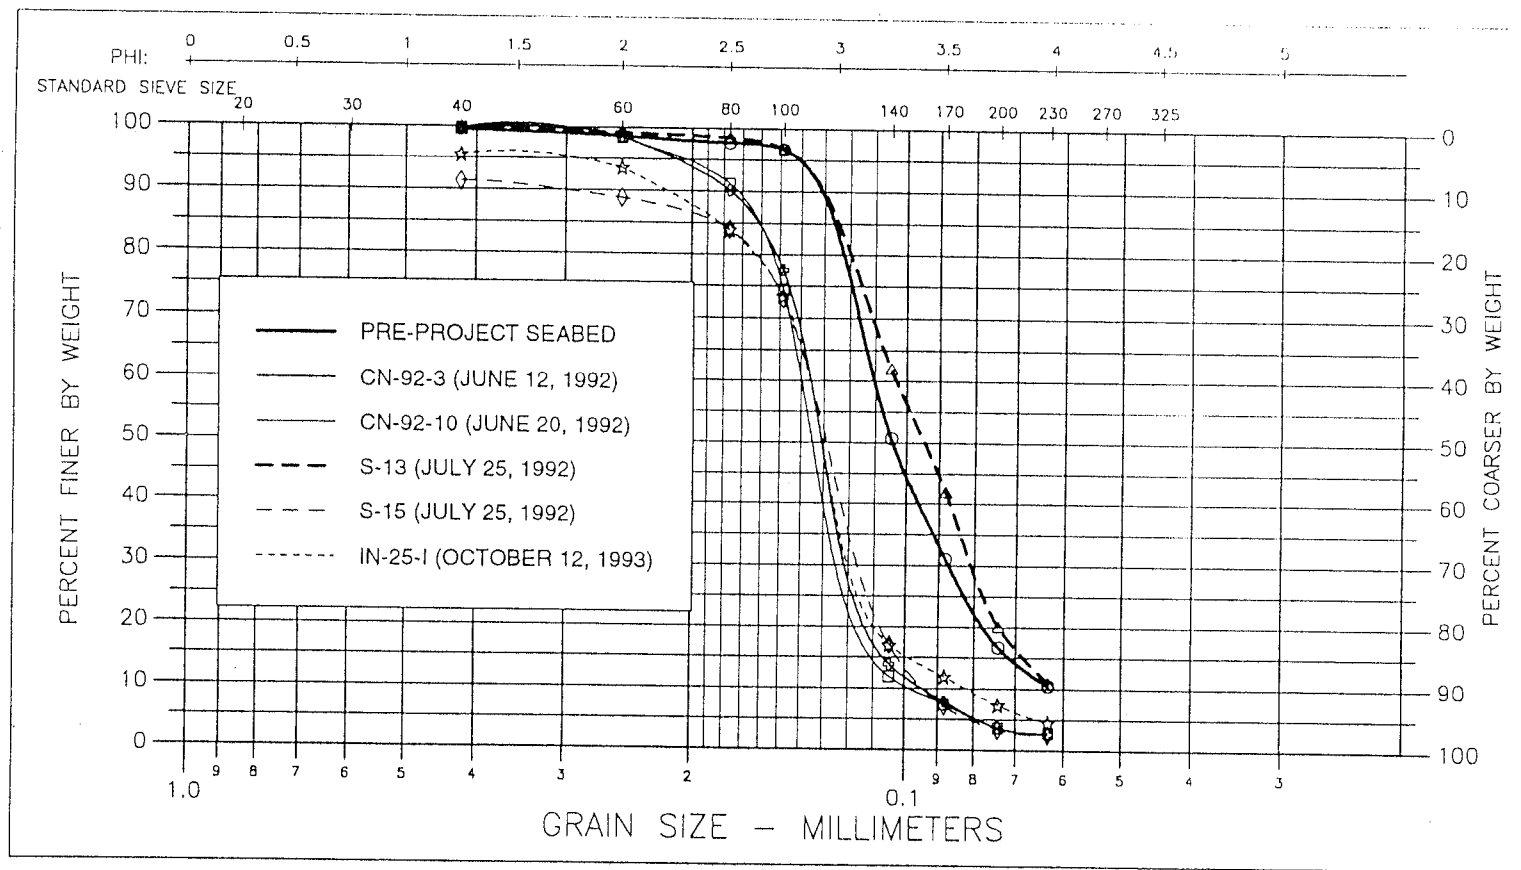


Figure C.1 Cross-Shore Sediment and Bathymetric Data : Station 125.